



INTERRUTTORI MAGNETICI E FOTOCELLULE MAGNETIC SWITCHES AND PHOTOCELLS

Un'ampia gamma di interruttori magnetici di prossimità caratterizzati da una elevata affidabilità; disponibili in diverse forme e con tutti i relativi accessori.





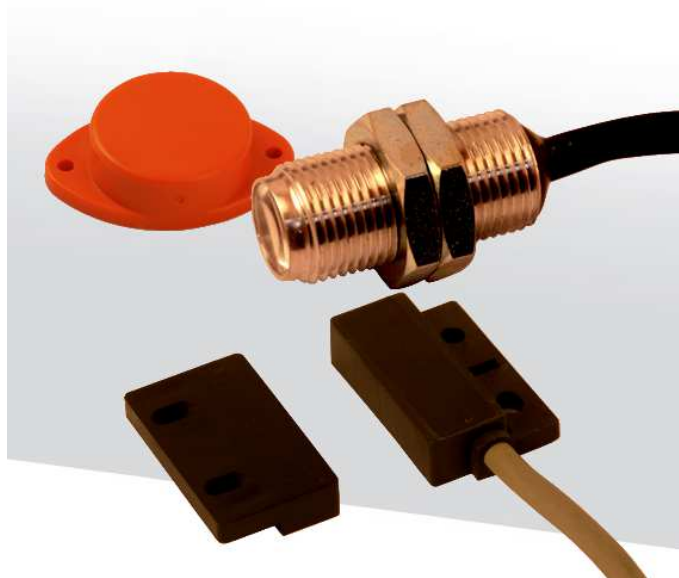



EN A wide range of magnetic proximity switches are characterized by a high reliability; available in various forms and with all its accessories. The modulated light photo-cells, 100% Made in Italy, are also available for automated switches.

FOTOCELLULE / PHOTOCELLS

	2BAAA	2BAAB
Codice		
Modello <i>Model</i>	LS500P – 500mm	LS500R – 500mm
Tipo <i>Type</i>	Proiettore <i>Projector</i>	Ricevitore <i>Receiver</i>
Funzionamento <i>Fixing</i>	A conduzione liquido <i>Nut</i>	A conduzione liquido <i>Nut</i>
Foto comando <i>Photo command</i>	FRL/FRL-L	FRL/FRL-L
Distanza massima <i>Maximum distance</i>	50 cm	50 cm
Dimensione minima rilevabile <i>Minimum detectable dimension</i>	8 mm	8 mm
Temperature <i>Temperature range</i>	-15 °C / +60 °C	-15 °C / +60 °C



INTERRUTTORI MAGNETICI E FOTOCELLULE MAGNETIC SWITCHES AND PHOTOCELLS

INTERRUTTORI / SWITCHES

	PDAAA	PDAAB	PDAAR	PDAAS	PDAAH	PDAAX
Codice <i>Code</i>						
						
Modello <i>Model</i>	PS500	PS510	PS6132	PS6231	PS3150	PS7711
Dimensioni mm <i>Dimensions mm</i>	32x10x6	32x10x6	30x18x6	30x18x6	23x14x6	20x20x10,4
Materiale contenitore <i>Case material</i>	ABS	ABS	ABS	ABS	ABS	ABS
Tipo contatti <i>Contact type</i>	1NA	1NC	1NA	1NC	1NA	1NC
Tensione massima di commutazione <i>Max commutation voltage</i>	200 VDC	200 VDC	200 VDC	200 VDC	100 VDC	200 VDC
Potenza massima commutabile <i>Max commutable power</i>	10W	10W	50W	25W	10W	10W
Corrente massima commutabile <i>Max commutable current</i>	0,5 A	0,5 A	1,0 A	0,5 A	0,5 A	0,5 A
Tensione di Break Down (tra contatti) <i>Break Down voltage (contacts)</i>	200 VDC	200 VDC	200 VDC	200 VDC	250 VDC	200 VDC
Tensione di Break Down (tra contatti e contenitore) <i>Break Down voltage (contacts-case)</i>	1500 VDC	1500 VDC	1500 VDC	1500 VDC	1500 VDC	1500 VDC
Temperatura ambiente <i>Temperature range</i>	-10 °C / 60 °C	-10 °C / 60 °C	-10 °C / 60 °C	-10 °C / 60 °C	-10 °C / 60 °C	-10 °C / 60 °C
Resistenza allo shock <i>Shock resistance</i>	30G	30G	30G	10G	30G	10G
Resistenza alle vibrazioni <i>Vibration resistance</i>	1,5mm (10-55 Hz)	1,5mm (10-55 Hz)	1,5mm (10-55 Hz)	1,5mm (10-55 Hz)	1,5mm (10-55 Hz)	1,5mm (10-55 Hz)
Connessione <i>Connection</i>	Cavetto UL 1007 AWG 26	Cavetto UL 1007 AWG 26	Cavetto UL 1007 AWG 26	Cavetto UL 1007 AWG 26	Cavetto UL 1007 AWG 26	Cavetto UL 1007 AWG 26
Lunghezza cavo <i>Cable length</i>	300 mm	300 mm	300 mm	300 mm	300 mm	300 mm

INTERRUTTORI MAGNETICI E FOTOCELLULE MAGNETIC SWITCHES AND PHOTOCELLS




INTERRUTTORI / SWITCHES

Codice	2NAAA	2NAAB	2NAAC	2PAAA	2PAAB
					
Modello <i>Model</i>	IMOM A10VA	IMOM A80VA	IMOM U60VA	IMP A80VA	IMP V60VA
Dimensioni mm <i>Dimensions mm</i>	48 x D6,7	85 x D10	85 x D10	71x40x17	71x40x17
Materiale contenitore <i>Case material</i>	Alluminio <i>Aluminium</i>	Alluminio <i>Aluminium</i>	Alluminio <i>Aluminium</i>	PVC	PVC
Tipo contatti <i>Contact type</i>	1NA	1NA	1U	1NA	1U
Tensione massima di commutazione <i>Max commutation voltage</i>	300 VDC	300 VAC	300 VAC	300VAC	300VAC
Potenza massima commutabile <i>Max commutable power</i>	10VA	80VA	60VA	80VA	60VA
Temperatura ambiente <i>Temperature range</i>	-20 °C / 60 °C	-20 °C / 60 °C	-20 °C / 60 °C	-20 °C / 60 °C	-20 °C / 60 °C

INTERRUTTORI MAGNETICI E FOTOCELLULE

MAGNETIC SWITCHES AND PHOTOCELLS

MAGNETI/ MAGNETS

	PHAAB	PHAAA	2RAAA	2RAAD
Codice <i>Code</i>				
				
Modello <i>Model</i>	TG 0016	PS 6001	MEL 1	MEL 2
Tipo di magnete <i>Magnet type</i>	Permanente <i>Permanent</i>	Permanente <i>Permanent</i>	Permanente <i>Permanent</i>	Permanente <i>Permanent</i>
Dimensioni mm <i>Dimensions mm</i>	30x9x4	30x18x6	57x37x15,5	71x40x17
Materiale contenitore <i>Case material</i>	ABS	ABS	PVC	PVC
Foro fissaggio <i>Fixing hole</i>	1 da 2,5 mm	2 da 2,5 mm	2 da 3,5mm	2 da 3,5mm

CATARIFRANGENTI/ REFLECTOR

	12AAA	12AAB	12AAC
Codice <i>Code</i>			
Forma <i>Shape</i>	Rotondo <i>Round</i>	Rotondo <i>Round</i>	Rettangolare <i>Rectangular</i>
Dimensioni mm <i>Dimensions mm</i>	D 47	D 80	180x50